

LED Under Cabinet Light



FDUC-46-18W-LED

T5 LED Bar

46 1/4" 18W LED Under Cabinet Light

Factory Direct Lighting
 100 Shields Court, Markham,
 ON Canada L3R 9T5
 Tel: 905-944-1210 • 1-855-533-0743 |
 Toll Fax: 1-855-533-3294
<http://www.factorydirectlighting.ca>

Features

Housing

Durable extruded aluminum frame with frosted smooth lens. Suitable for dry location applications only. On-body on/off switch is provided for individual control (except 9" models).

LED Driver

Fixture is provided with built-in silent non-flicker electronic LED driver, 120V, 60Hz.

Light Output

This accent light is available in 3000°K, 4000°K colour temperature.

Dimming

Fixture is dimmable with industry standard TRIAC, ELV and Incandescent dimmers.

LED Characteristics

Powered by LED integrated strip that maintains uniform intensity with 70% lumens at 50,000 hours average life; with a minimum CRI of 80.

Beam Spread

The fixture lens provides for 160° beam spread.

Linking

Complete with a joiner, these no shadow linking fixtures can be linked up to 10 units in a single run.


Mounting Kit

Hardware provided for mounting fixture to standard horizontal surfaces or vertical wall surface.

Operating Temperature

-10°C~40°C (14°F~104°F).

| SPECIFICATION | |
|----------------------|----------------------------|
| Approved Location | Damp |
| Beam Angle | 160° |
| CCT | 3000°K / 4000°K / |
| Certification | cETLus |
| Connection Type | 3-Wire |
| CRI | 80+ |
| Dimming | Yes |
| Dimming Technology | TRIAC / ELV / Incandescent |
| Lumens | 1557 / 1577 |
| Lumens per watt | 87 / 88 |
| Max. Operating Temp. | 40°C |
| Min. Start Temp. | -10°C |
| Lumen Maintenance | 70% @ 50,000 hrs |
| Rated Life | 50,000 hrs |
| Voltage | 120V |
| Warranty | 3 Years |
| Wattage | Up to 5 |

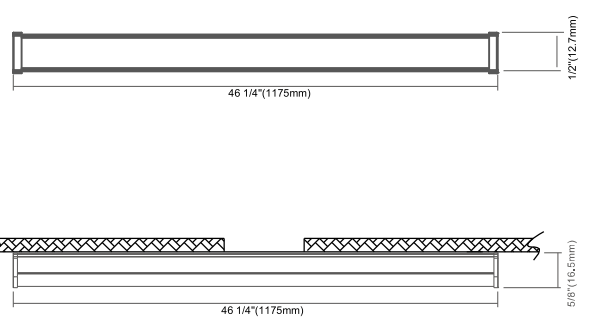

Ordering Guide

FDUC 46-18W-LED- K
 30K:3000K
 40K:4000K

Accessories
 FDUC-HB (Hardwire Box with Switch)
 FDUC-FC (6" Flex Connector)
 FDUC-PC (3 Wire Power Cord)