



Installation Instruction

6" & 8" LED Flush Mount

Pre-Select 5 CCT

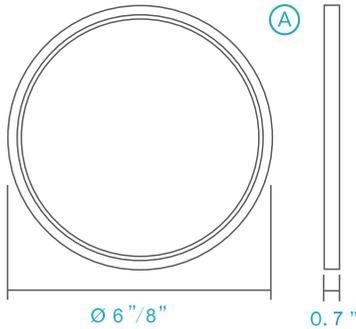

PART	DESCRIPTION	QTY
A	SLIM FLUSH MOUNT FIXTURE	1
B	MOUNTING PLATE	1
C	MOUNTING SCREWS	2
D	WIRE CONNECTORS	3
E	SPRINGS(OPTIONAL)	2
F	E26 ADAPTER(OPTIONAL)	1




TOOLS AND MATERIALS REQUIRED




SAFETY RECOMMENDATIONS

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. CAUTION: RISK OF FIRE. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
4. FOR EXTERNAL USE ONLY: IT IS RECOMMENDED TO APPLY WATERPROOF SILICONE TO SEAL AROUND TRIM AND CEILING.




Option #1: FLUSH MOUNT

Fig. 1 Electrical Junction Box




1. Pull the supply wires and house ground wire from the Outlet Box. Position the mounting plate over the Junction Box. Mark the location of the two holes located on the Mounting Plate. Be sure to mark only the narrow parts of the hole. Removing Plate from the ceiling. Drill the two holes using the appropriate type and size drill bit. Insert anchors into the holes. (See Fig.1)

Fig. 2



2. Wire Connections: Connect the house ground wire to the fixture ground wire; connect the white supply wire to the white fixture wire; connect the black supply wire to the black fixture wire by using the wire connectors. Carefully tuck all wires back into the Junction Box. Adjust the 5CCT switch (See Fig.2.)

Fig. 3



3. Snap and fix the clip in the bracket. (See Fig . 3)


Fig. 4



4. Turn on the power and Light up the lamp. (See Fig . 4)


Option #2: RETROFIT A RECESSED CAN

Fig. 1

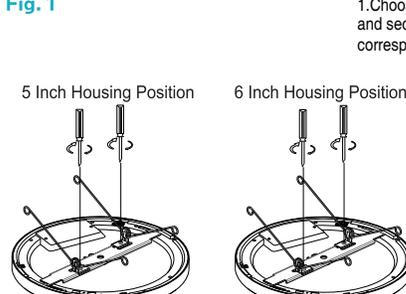


1. Choose a 5-inch or 6-inch housing and secure it with screws at the corresponding holes on the bracket.

Fig. 2

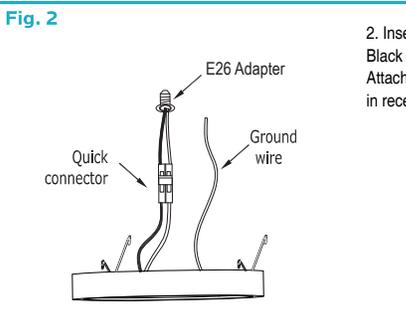

2. Insert wires into Quick connector. Black to black and white to white. Attach ground Wire to ground screw in recessed can. Adjust 5 CCT Switch.

Fig. 3

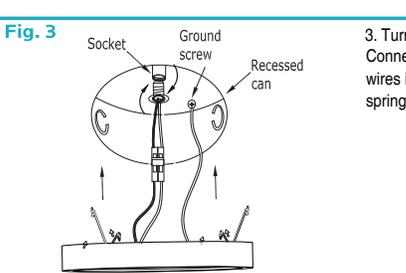

3. Turn E26 adapter into socket base. Connect Quick Connectors Tuck all wires into recessed can. Squeeze springs and push up into recessed can.

Fig. 4



4. Turn on the power and Light up the lamp. (See Fig . 4)