


LED Emergency Remote Light, 1-Head




The single led remote head is constructed of high impact thermoplastic. A tool-less mechanically adjustable swivel locks the head in position once adjusted.

Dimension

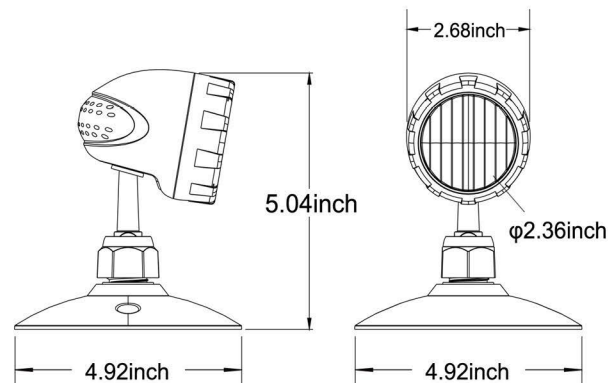


Features and Specifications:

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-retardant
- Wall and ceiling mounting
- Universal voltage LED remote compatible with any emergency lighting system (3.6-24VDC)
- Super bright SMD LED 2W 130lm
- Suitable for damp locations
- cULus listed

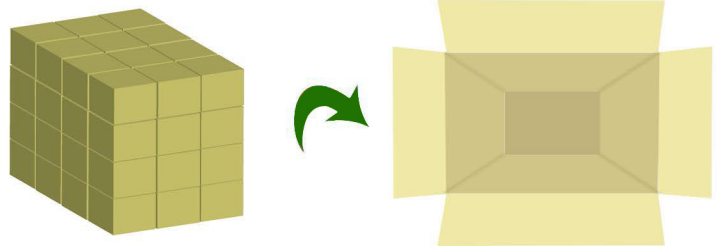


**Shipping Carton
48pcs each**

Illuminance (at a distance)

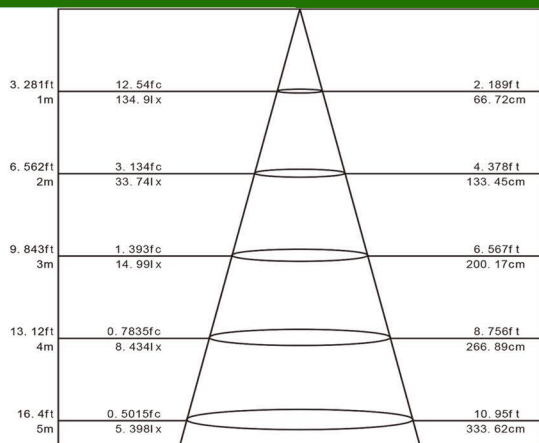

HT EAVG/EMAX ANGLE:36.90DEG DIA

Luminous Intensity Distribution Diagram

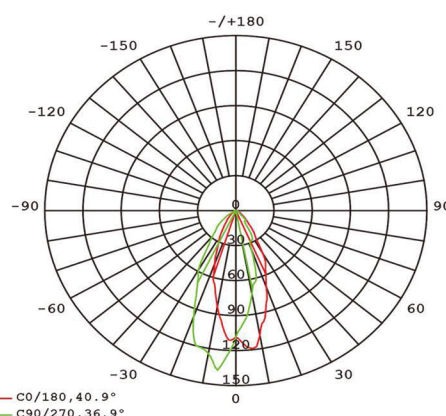

AVERAGE BEAM ANGLE(50%):38.9 DEG

Factory Direct Lighting (2020) Ltd.
www.fdlighting.ca
Tel: 1-855-533-0743
1-905-944-1210

100 Shields Court Unit B
Markham, Ontario
Canada, L3R 9T5