
12" Square LED Flush Mount



FDFM-22W-LED-3K-120V-D-SQ Ref. 101037

Surface mount downlighting

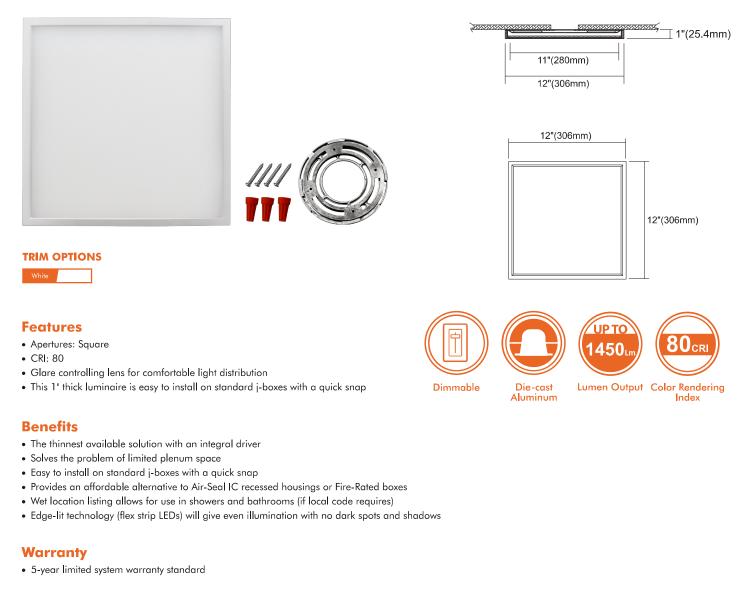

Applications

SlimSurface LED Downlight is characterized by a completely flat lens with a narrow flange, giving it an architecturally pleasing look. This downlighting solution offers an affordable alternative to Air-Seal IC recessed housings or Fire-Rated boxes, reducing material and installation costs.

					Intertek ENERGY STAR WET LOCATION						
Specification											
Model	Series	Input Voltage	Wattage	Lumen Output	Luminous Efficacy	CRI	Listed	Projected Life	CCT'S		
FDFM-22W-LED-3K -120V-D-SQ	Square	120V	22W	1450 Lm	66Lm/w	80	Damp/ Wet	50,000 hrs	3000K, 4000K, 5000K		

Factory Direct Lighting (2020) LTD., 100 Shields Court, Unit-B, Markham, ON, L3R 9T5 | Tel: (905) 944-1210 | Toll: (855) 533-0743