

FDL LED SHOP LIGHT



■ Product Features



- Easily use, can be plug into power socket.
- Instant on to full brightness.
- Input Voltage: 120V, 50/60Hz.
- CRI(Ra)>80, Beam Angle> 120°.
- ETL/cETL/listed.50,000 Hrs, 5 years warranty.







■ Product Applications

Metal SHOP LIGHT Wide Application: great solution for garages, workshop, basement, warehouse, equipment room.

■ Structure Features

- **Shell materials:** Pastic+Aluminum
- **Color:** Sliver
- **Net weight:** 1.10Kg (2.42lbs) **Unit:** inch(mm)




- Linkable need to add linkable wire or a connector (Sold Separately)

Factory Direct Lighting |100 Shields Court, Markham, ON Canada L3R 9T5 | 905-944-1210 •
1-855-533-0743 | <http://www.fdlighting.ca>

■ Technical Parameters

Type	FDSL-2040		
Power	40W	Lighting Angle	>120°
Input Voltage	AC120V	LED Brightness Decay	<5%/6000 hrs
PF	>0.9	Working Life	>50000 hrs
Driver Efficiency	>90%	Working Temperature	-30 - +45°C
Luminous Flux	5269LM	Storage Temperature	-40 -+80°C
Color Temperature	5000K	Protection Level	IP40/Damp Location
CRI	Ra>80	Cable	20AWG

■ Photometry :

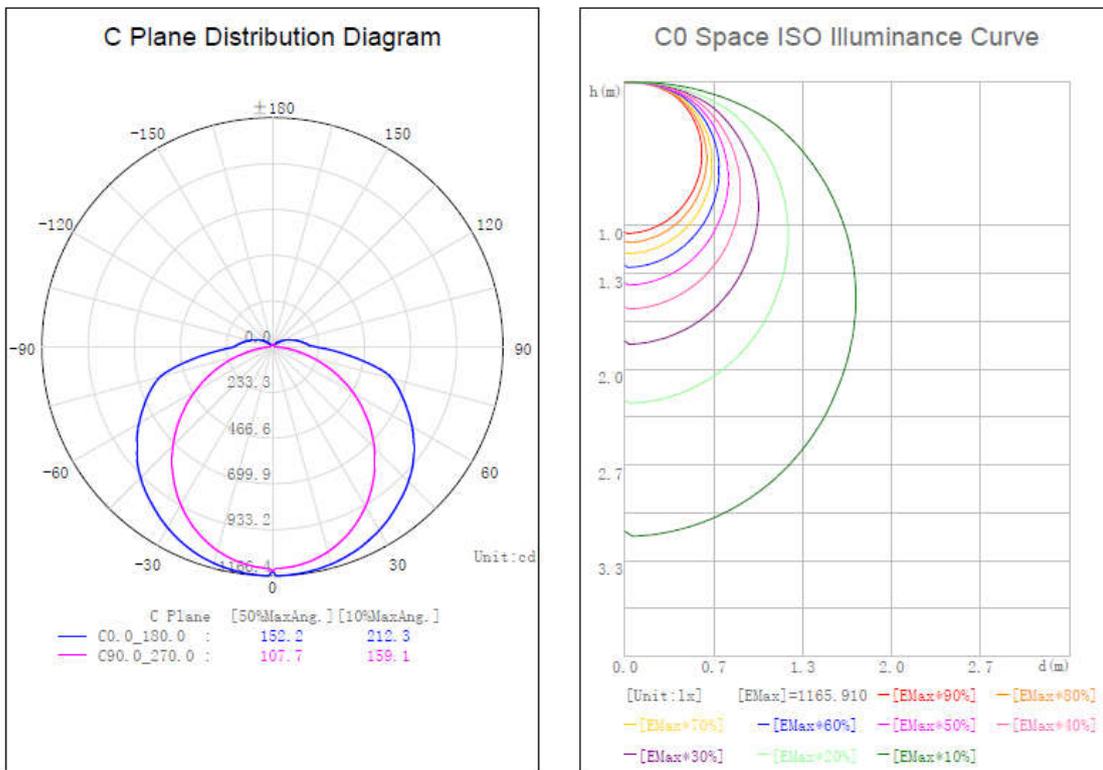

FDL LED SHOP LIGHT



■ ORDERING INFORMATION:

EXAMPLE: FDSL-2040-5K-120V

FDL	SL	2040	50	B
Company	Product	Power	CCT	Voltage
FDL	SL SHOP LIGHT	2040(40W)	5K	120V

■ Product Certifications

