

4" LED Multiple Application Recessed Downlight



SPECIFICATIONS	FDMAR-4-LED8W-5CCT-WH
Lumens	500lm
Watts	8W
Efficacy	66lm/W
CRI	80Ra+
ColorTemperature	Pre-Select 5 CCT (2700K/3000K/3500K/4000K /5000K)
Input Volts & Frequency	AC120V, 60Hz
Power Factor	>0.95
Operating Temp.	-20° ~ 40°
Beam Angle	110°


Features

- * Adjustable CCT between 2700K, 3000K, 3500K, 4000K and 5000K.
- * Built-in on board driver with 90mA output and 120V AC input
- * Durable airtight aluminum body with iron trim
- * Mounting: for use with a standard octagon junction box or 4" recessed housing
- * Suitable for WET LOCATION
- * IC rated for direct contact with insulation
- * 10%-100% dimming capability, this fixture is compatible with industry standard TRIAC/ELV dimmers
- * 50,000 hrs


PACKAGE	
Weight.(g)	200g
Qty/CTN (pcs)	24 pcs/CTN
Box Dimension	420(L) x 285(W) x 245(H) mm
Gross Weight	6.5 kg/CTN



DIMENSION






Ø4-7/8" (125mm)



1-1/8" (28mm)

INSTALLATION

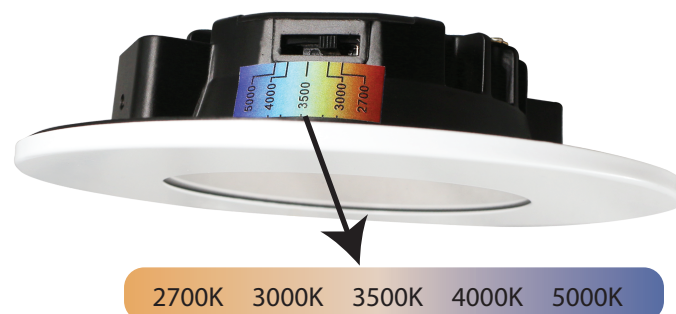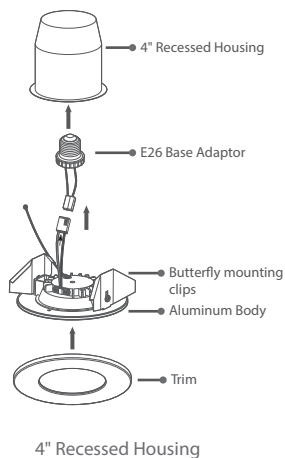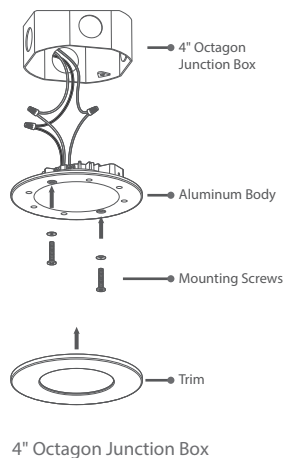

INCLUDED IN BOX

- 1 interchangeable magnetic trim
- 2 Mounting Screws to J-BOX
- 3 Fixture

E26 Base Adaptor
Used when mounted to a compatible 4" recessed housing



Butterfly Mounting Clips With Screws
Used when mounted to a compatible 4" recessed housing



Mounting Screws
Used when mounted to a fire-rated octagon junction box

