

Pre-Select 5 CCT 6" LED Flush Mount

FDFM-15W-LED-5CCT-120V-D
SKU#101082



SPECIFICATIONS	
Model	FDFM-15W-LED-5CCT-120V-D
Watts	15W
CRI	80R
Color Temperature(K)	Pre-Select 5 CCT 2700K, 3000K, 3500K, 4000K, 5000K
Light Output(lm)	900lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	120°


Features

- Edge-lit technology, no glare or dark spots, instant-on
- This 5/8" thick luminaire is easy to install on standard J-boxes with a quick snap
- Construction: plastic with white translucent acrylic lens
- Dimming: TRIAC Dimming 10% - 100%
- I.C. rated for direct contact with insulation
- Suitable for WET LOCATION
- Rated for a long life - over 50,000 hours
- Pre-select 5 CCT 2700K, 3000K, 3500K, 4000K, 5000K



PACKAGE	
Weight.(g)	330g
Qty/CTN (pcs)	20pcs/CTN
Box Dimension	433*180.5*430mm
Gross Weight	7.8kg/CTN

DIMENSIONS

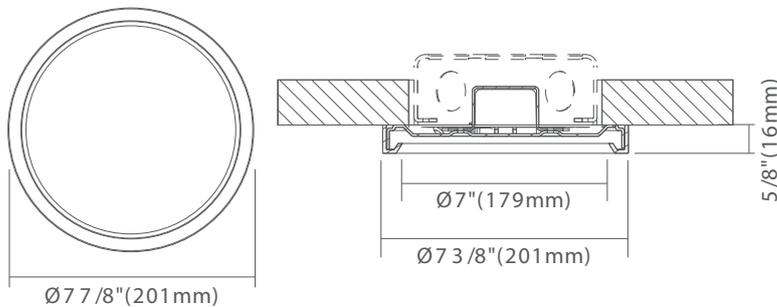

INCLUDED IN BOX

- 6" LED Flush Mount, Round
- Mounting bracket to J-Box
- Two J-box Screws
- Three Wire Nuts

Accessories (sold separately)

Installation

4" J -Box

Accessories included:
Attach mounting bracket to J-box
Click downlight into mounting bracket

4" & 6" Housing

Accessories sold separately
Connect E26 adapter to the LED adapter
Insert mounting clips and push downlight up until flush with ceiling

, Screw, and LED Adapter."/>

Optional RINGS

Mounting Bracket for Housing

Mounting Bracket for 4" & 6" Housing