





## Dimension



## Installation

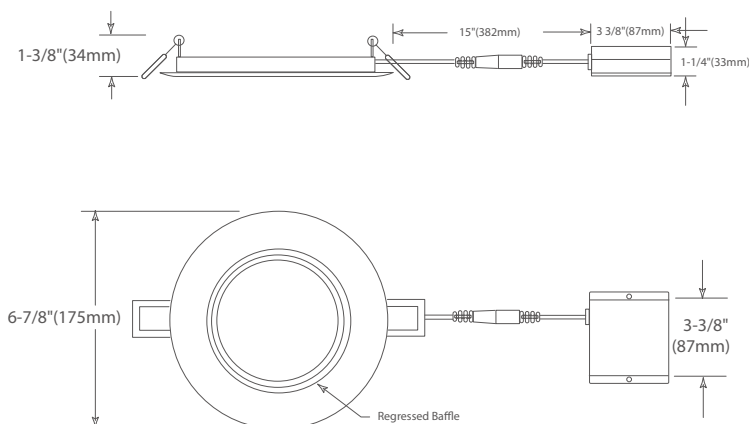

Cut Hole Size  
Ø6 1/4" (158mm)



## Features

- \* Regressed lens and Baffle Trim Design
- \* Edge-lit technology, no glare or dark spots, instant-on
- \* Pre-Select 5CCT 2700K, 3000K, 3500K, 4000K, 5000K
- \* 80CRI
- \* No existing recessed housing or junction box required
- \* Fixture will not fit into existing housing or junction boxes
- \* Suitable for WET LOCATION
- \* IC rated for direct contact with insulation
- \* 10%-100% dimming capability, this fixture is compatible with industry standard TRIAC/ELV dimmers
- \* Rated for a long life - 50,000 hrs

## Accessories

### Extension Cable



- 4" Flexible Connector, For use with Slim LED Fixtures
- 6" Flexible Connector, For use with Slim LED Fixtures
- 10" Flexible Connector, For use with Slim LED Fixtures
- 20" Flexible Connector, For use with Slim LED Fixtures

### Goof Ring




- 4" Goof Ring, For use with Slim LED Fixtures


### Mounting Plate



- a 4" new construction pre-mounting plate opening Ø4-1/4" (108mm)



- a 3" 3/4" 6" new construction pre-mounting plate opening Ø3" (75mm), Ø4-3/8" (110mm), Ø6-1/4" (160mm)



- a 4" new construction pre-mounting plate with collar for use with screw down "C" style remodel housings opening Ø4-3/8" (110mm)

SPECIFICATIONS	FDLED-6-B12W-5CCT-WH	FDLED-6-B15W-5CCT-WH
Lumens	700lm	1000lm
Watts	12W	15W
Efficiency	57.4lm/w	66.7lm/w
CRI	80	
CCT	Pre-Select 5CCT - 2700K, 3000K, 3500K, 4000K, 5000K	
Input Volts & Frequency	120V 60Hz	
Power Factor	>0.9	
Operating Temp.	(-4°F~104 °F) -20~40°C	
Beam Angle	120°	
Dimming	YES	