




No shadow linking connector

### Standard Accessories



Slide Switch  
Pre-Select 3CCT 3000K-4000K-5000K  
On/off switch

### Optional Accessories

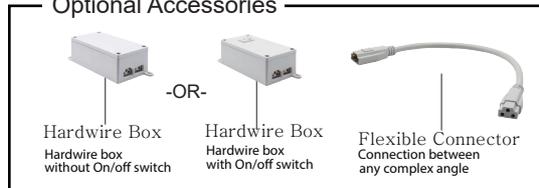

High Quality LED Chips  
Brighter with lower power consumption

Eliminate dotted appearance

## Features


- Ultra slim body and frosted milky PC diffuser, easy to hide
- Made of durable extruded aluminum frame with frosted milky PC lens
- No shadow linking connector
- Input voltage: AC 120V 50/60Hz
- Dimmable with Triac, ELV and LED dimmers
- Link up to 10 fixtures
- Easy installation: metal mounting clips with two screws
- Color rendering index: 80Ra+
- Powered by LED integrated strip that maintains uniform intensity with 70%
- 50,000 hours average life
- Beam angle: 160°
- Pre-Select 3CCT 3000K-4000K-5000K

	Specification				
Product No.	FDUC-9-3W	FDUC-11-5W	FDUC-23-9W	FDUC-34-14W	FDUC-46-18W
Length	9"	11"	23"	34"	46"
Watts	3W	5W	9W	14W	18W
Lumen	260lm	420lm	760lm	1120lm	1530lm
ColorTemperature	Pre-Select 3CCT 3000K-4000K-5000K				
CRI	80Ra+				
Input	AC120V,60Hz				
Dimming	Triac Dimming 10%-100%				
Power Factor	>0.9				
Approved Location	Damp Location				
Operating Temp.	(-4 °F~104 °F)-20~40 °C				
Beam Angel	160°				

\*Product No.: FDUC-XX-XXX-LED-3K4K5K-120V-D  
The Product No. in the chart above presents the FDUC-XX-XXX part of the full Product No.




## DIMENSION

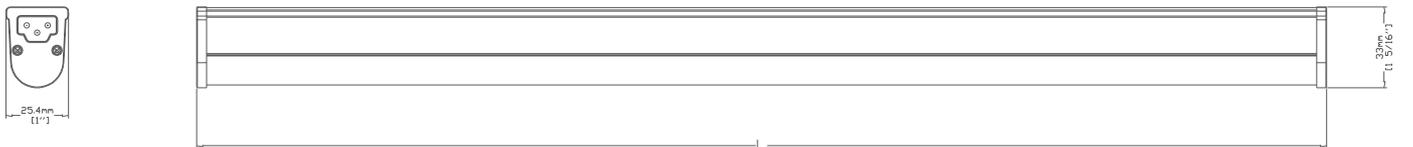

L : 9"(229mm)/14"(344mm)/23"(575mm)/34"(875mm)/46"(1175mm)/58"(1475mm)

## Power Cord Installation

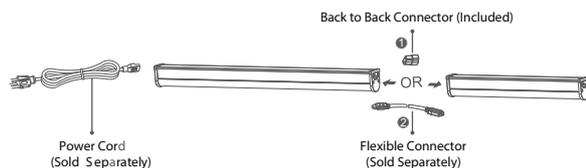

## Hardwire Box Installation

