



4" Regressed Module Downlight

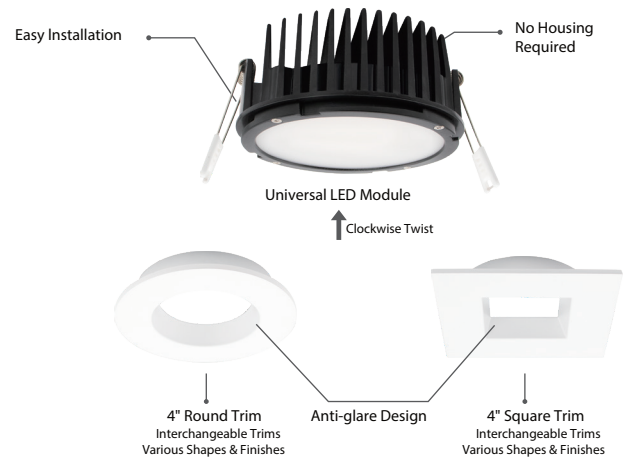

Trim Finish Options

- BLACK
- WHITE

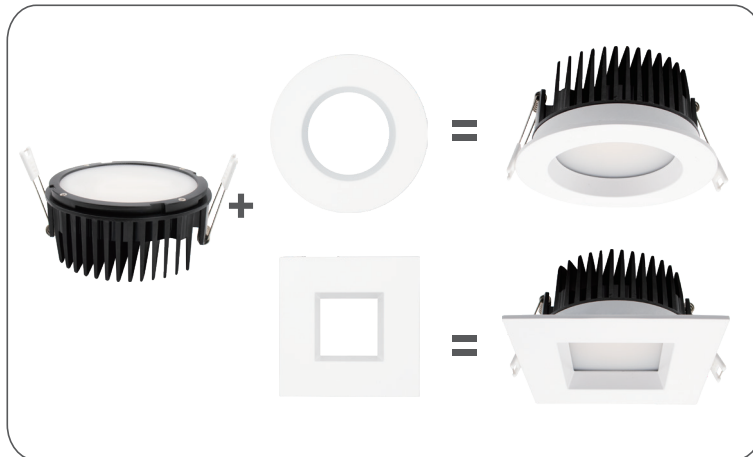

Description


4" Regressed Module Downlight

Features


- * Interchangeable Trims
- * Available shapes: Round and Square
- * Type IC, Air-Tight & Suitable for Wet Location - No Housing Required
- * Fast Installation & No Junction Box Needed
- * Includes two spring loaded clips to attach to any ceiling material.
- * 10%-100% dimming capability. This fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers
- * Rated for long life - over 50,000 hours



DIMENSIONS

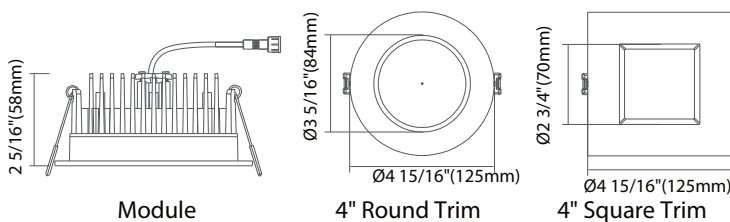


INSTALLATION

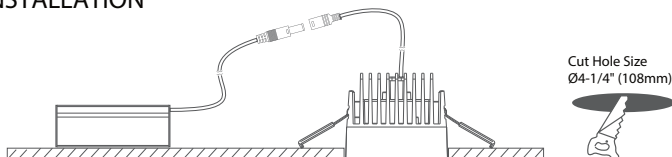

OPTIONAL ACCESSORIES



Mounting Plate



FD-UNMP (SKU#101078)
Universal Mounting Plate,
compatible with 2", 3", 3.5", 4"
Light Panel and Downlights

FD-MPBC-4 (SKU#101007)
4-1/4" Round Pre-Mounting Plate
(26" length) For Slim LED round fixtures

Flexible Connector



10ft/ 20ft flexible
connector

Emergency Power Pack



SKU#110502
AC120-347 VAC 50/60Hz,
emergency time 90 mins

SPECIFICATIONS	
Model	FDRS-4-15W-5CCT-120V-R
Watts	15W
CRI	80Ra+
Color Temperature(K)	Pre-Select 5CCT 2700K/3000K/3500K/4000K/5000K
Light Output(lm)	1000lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming 10-100%
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
IC Rated	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	90°

PACKAGE	
Weight.(g)	440g
Qty/CTN (pcs)	18pcs/CTN
Box Dimension	L345xW300xH305mm
Gross Weight	9.42kg/CTN

INCLUDED IN BOX

- 4" Regressed Module Downlight and Remote Driver

